

SERVICE: Potable Water Suction and Delivery.


HOSE TYPE: 415 LI Rig Supply Hard Wall.

HOSE CONSTRUCTION: Lining: White Natural Rubber - FDA Approved.
Reinforcement: High Tensile Textile Cords With Embedded Steel Helix Wires.
Cover: Orange NBR/PVC Blend - Abrasion, Ozone And Hydrocarbon Resistant.

END FITTINGS: Long Tail Hookie Hook Type Combination Nipples In API 5L Grade B Zinc Plated And Fully Passivated. API Male Thread.

TYPE OF SWAGE: Internal/External.

VISUAL IDENTIFICATION: End Collars Painted In High Visibility Fluorescent Paint; Colour – Blue.

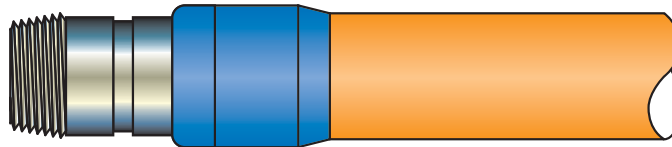

Colour Codes: Orange cover, blue collar each end.

Hose Construction Diagram:



Bore Diameter		Outside Diameter		Working Pressure		Burst Pressure		Minimum Bend Radius		Vacuum	Average Weight
mm	in	mm	bar	psi	bar	psi	m	ft	mmHg %	kg/m	
76	3	92	10	150	40	600	0.304	1.2	90%	3.62	
102	4	119	10	150	40	600	0.408	1.38	90%	4.81	

MARKING: Traceable Identification Code To Be Hard Stamped On Both End Nipples:

- (a) Manufacturer's Trade Mark.
- (b) Manufacturer's Type Code.
- (c) Year And Month Of Manufacture.
- (d) Maximum Safe Working Pressure (BAR G).
- (e) Unique Serial Number Identifying Each Length.