

SERVICE: Potable Water Delivery


HOSE TYPE: 442 LI Rig Supply Soft Wall.

HOSE CONSTRUCTION: Lining: White Natural Rubber – FDA Approved.
Reinforcement: High Tensile Textile Cords.
Cover: Orange NBR/PVC Blend – Abrasion, Ozone And Hydrocarbon Resistant.

END FITTINGS: Long Tail Hookie Hook Type Combination Nipples In API 5L Grade B Zinc Plated And Fully Passivated. API Male Thread.

TYPE OF SWAGE: Internal/External

VISUAL IDENTIFICATION: End Collars Painted In High Visibility Fluorescent Paint; Colour – Blue.

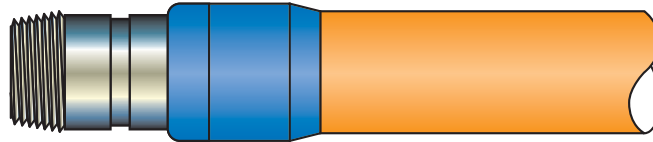

Colour Codes: Orange cover, blue collar each end.

Hose Construction Diagram:



Bore Diameter		Outside Diameter	Working Pressure		Burst Pressure		Vacuum	Average Weight
mm	in	mm	bar	psi	bar	psi	mmHg %	kg/m
76	3	94	10	150	40	600	N/A	2.85
102	4	120	10	150	40	600	N/A	3.8

MARKING: Traceable Identification Code To Be Hard Stamped On Both End Nipples:

- (a) Manufacturer's Trade Mark.
- (b) Manufacturer's Type Code.
- (c) Year And Month Of Manufacture.
- (d) Maximum Safe Working Pressure (BAR G).
- (e) Unique Serial Number Identifying Each Length.