

SERVICE: Fuel, Oil and Liquid Mud Delivery

HOSE TYPE: 642 AA Rig Supply Soft Wall.


HOSE CONSTRUCTION: Lining: Black Conductive NBR.
Reinforcement: High Tensile Textile Cords.
Cover: Black Conductive NBR/PVC Blend, Abrasion, Ozone, Hydrocarbon And Flame Resistant.

END FITTINGS: Long Tail Hookie Hook Type Combination Nipples In API 5L Grade B Zinc Plated And Fully Passivated. API Male Thread.

TYPE OF SWAGE: Internal / External.

VISUAL IDENTIFICATION: End Collars Painted In High Visibility Fluorescent Paint; Colour – Dependent on service.

Please note that it is the colour of the coupling which identifies the product. Example shown is for diesel/fuel:-

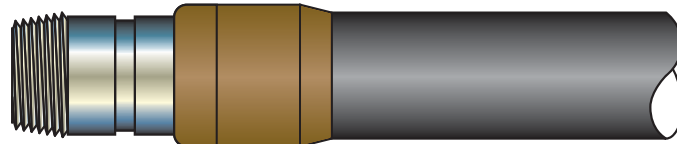

Colour Codes: Black cover brown collar.

Hose Construction Diagram:



Bore Diameter		Outside Diameter	Working Pressure		Burst Pressure		Vacuum	Average Weight
mm	in	mm	bar	psi	bar	psi	mmHg %	kg/m
76	3	94	10	150	40	600	N/A	2.8
102	4	120	10	150	40	600	N/A	3.7
127	5	145	10	150	40	600	N/A	4.6
152	6	170	10	150	40	600	N/A	5.5

MARKING: Traceable Identification Code To Be Hard Stamped On Both End Nipples:
 (a) Manufacturer's Trade Mark.
 (b) Manufacturer's Type Code.
 (c) Year And Month Of Manufacture.
 (d) Maximum Safe Working Pressure (BAR G).
 (e) Unique Serial Number Identifying Each Length.