

**SERVICE:** Fuel, Oil and Liquid Mud Suction and Delivery.

**HOSE TYPE:** 652 AA(Z) Rig Supply Hard Wall.


**HOSE CONSTRUCTION:** Lining: Black Conductive NBR.  
Reinforcement: High Tensile Textile Cords With Embedded Steel Helix Wires.  
Cover: Black Conductive NBR/PVC Blend, Abrasion, Ozone And Hydrocarbon Resistant.

**END FITTINGS:** Long Tail Hookie Hook Type Combination Nipples In API 5L Grade B Zinc Plated And Fully Passivated.

**TYPE OF SWAGE:** Internal/External

**VISUAL IDENTIFICATION:** End Collars Painted In High Visibility Fluorescent Paint; Colour – dependent on service

Please note that it is the colour of the coupling which identifies the product. Example shown is for diesel.

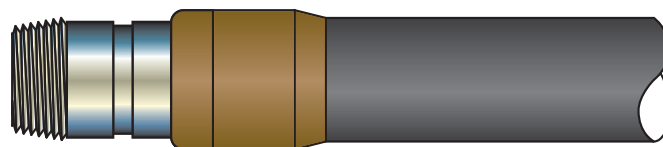

**Colour Codes:** Black cover brown collar.

**Hose Construction Diagram:**



| Bore Diameter |    | Outside Diameter |     | Working Pressure |     | Burst Pressure |      | Minimum Bend Radius |        | Vacuum | Average Weight |
|---------------|----|------------------|-----|------------------|-----|----------------|------|---------------------|--------|--------|----------------|
| mm            | in | mm               | bar | psi              | bar | psi            | m    | ft                  | mmHg % | kg/m   |                |
| 102           | 4  | 130              | 35  | 500              | 140 | 2,000          | 0.51 | 1.5                 | 90%    | 6.21   |                |
| 127           | 5  | 157              | 30  |                  | 120 |                | 0.64 |                     | 90%    | 9.23   |                |

**MARKING:** Traceable Identification Code To Be Hard Stamped On Both End Nipples:  
 (a) Manufacturer's Trade Mark.  
 (b) Manufacturer's Type Code.  
 (c) Year And Month Of Manufacture.  
 (d) Maximum Safe Working Pressure (BAR G).  
 (e) Unique Serial Number Identifying Each Length.