

SERVICE: Bulk Material Delivery.

HOSE TYPE: 742 AA Rig Supply Soft Wall.


HOSE CONSTRUCTION: Lining: Black Conductive Natural Rubber. Abrasion Resistant.
Reinforcement: High Tensile Textile Cords.
Cover: Black Conductive SBR/NR Bland, Abrasion And Ozone Resistant.

END FITTINGS: Long Tail Hookie Hook Type Combination Nipples In API 5L Grade B Zinc Plated And Fully Passivated. API Male Thread.

TYPE OF SWAGE: Internal/External.

VISUAL IDENTIFICATION: End Collars Painted In High Visibility Fluorescent Paint; Colour – dependent on service.

Please note that it is the colour of the coupling which identifies the product. Example shown is for baryte.

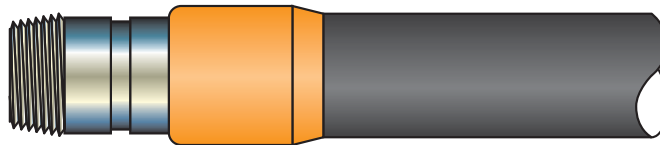

Colour Codes : Black cover orange collar.

Hose Construction Diagram:



Bore Diameter		Outside Diameter	Working Pressure		Burst Pressure		Vacuum	Average Weight
mm	in	mm	bar	psi	bar	psi	mmHg %	kg/m
102	4	122	10	150	40	600	N/A	3.95
127	5	147	10	150	40	600	N/A	4.85

MARKING: Traceable Identification Code To Be Hard Stamped On Both End Nipples:

- (a) Manufacturer's Trade Mark.
- (b) Manufacturer's Type Code.
- (c) Year And Month Of Manufacture.
- (d) Maximum Safe Working Pressure (BAR G).
- (e) Unique Serial Number Identifying Each Length.